

PACKING LIST

- 1 x DuoLED-BT Headset
- 1 x Base Station
- 1 x USB Type-C to Type-C cable
- 1 x USB Type-A to Type-C adapter
- 1 x portable case

Note: The Headset support starts from the following Headset integration versions (released in WMS 5.02): 2.9.9 (Windows) and 2.9.0 (macOS).

SAFETY INFORMATION

<https://www.wildix.com/safety-information/>

COMPATIBILITY

The Headset supports dual (multipoint) wireless connection, which means it can be connected to two devices simultaneously:

1. Via Base Station. Such connection provides full support of LED user and call statuses and compatible with:

- Apple Mac, Windows PC
- WorkForce *
- WelcomeConsole *

* Temporary limitations:

- Full LED user statuses support for WorkForce, WelcomeConsole will be available later
- The Headset cannot be connected to Vision/ SuperVision via Base Station, the support will be available later

2. Via Bluetooth module embedded in the Headset itself. Such connection doesn't provide LED statuses support and compatible with:

- Android, iOS apps
- Vision/ SuperVision
- W-AIR LifeSaver
- W-AIR Med
- W-AIR Office

POWER ON/ POWER OFF

Press **Multi-function** button for 3 seconds.

HEADSET AND BASE STATION OVERVIEW



CHARGING

1. Connect USB cable to the Base Station
2. Plug the cable into a device USB port (use Type-A adapter if needed)
3. Place DuoLED-BT into the Base Station
4. When charging, Headset status LED turns red
5. When charged, Headset status LED turns blue

Battery charging time

- Less than 60 minutes to charge 20%
- Less than 90 minutes to charge 50%
- Fully charged in less than 3,5 hours

Standby time


- Up to 100 hours if not connected to any device
- Up to 15 hours if connected to a device with full LED user and call statuses support
- Up to 20 hours if connected to if connected to a device with LED call statuses support

CONNECT VIA THE BASE STATION

1. Connect USB cable to the Base Station
2. Plug the cable into a device USB port (use Type-A to Type-C adapter if needed)
3. Turn the Headset on
4. The Headset Status LED starts blinking and the voice prompt announces "Your Headset is connected"
5. For Collaboration, set "Wildix DuoLED-BT" as audio device in Collaboration -> Settings -> Web phone

CONNECT VIA BLUETOOTH EMBEDDED IN THE HEADSET

1. Unplug the Base Station and turn the Headset off
2. Activate Bluetooth on a device you want to connect the Headset to
3. Press and hold the **Multi-function** button for 3 seconds until you hear "Power on". Keep pressing for 3 seconds more until you hear "Pairing"
4. Search for DuoLED-BT in Bluetooth devices list on your device and select it for pairing
5. If pairing is successful, the voice prompt announces "Paired... Your Headset is connected"

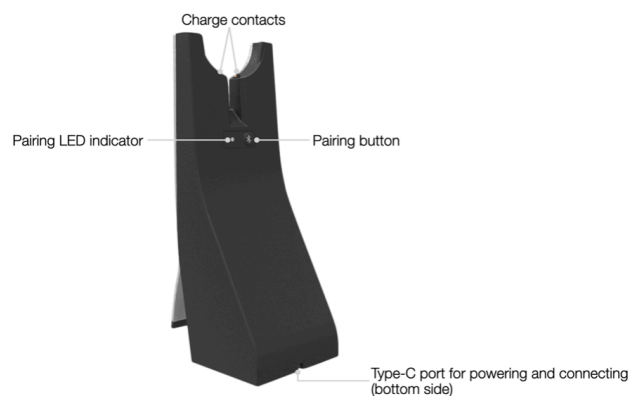

LED INDICATORS

Status LED

User/ call status	LED indication	Color
Available	Steady on	Green
Away		Yellow
DND/ in conference		Violet
Outgoing call/ In call		Red
Hold		Fast short blinks
Missed call	Long blinks followed by fast short blink	Status color + red
Incoming call	Fast short blinks	Red

Headset status LED

Headset status	LED indication	Color
Power on	One blink	Blue
Power off		Red
Pairing mode	Fast short blinks	Blue
Pairing successfully	Long blinks	Blue
Answer a call		
Charging	Steady on	Red
Fully charged		Blue


Base Station pairing LED

- Successful connection - long blue blinks
- Pairing - fast blue and red blinks

CHECK THE BATTERY LEVEL

On Windows you can check the battery level using WIService tray:

- Go to Quick Launch Toolbar -> right-click on Wildix Integration Service icon and check the level of battery (Low, Medium, High):



ANSWER A CALL

Press **Multi-function** button to answer a call.

ADJUST VOLUME DURING A CALL/ RINGER VOLUME

Press **Volume Up** to increase the volume.
 Press **Volume Down** to decrease the volume.

MUTE A MIC

Press **Mute** button during a call to put a call on hold / resume.

PUT ON PAUSE/ RESUME A CALL

Press **Multi-function** button for 2 seconds during a call to put a call on hold / resume.

END A CALL

Press **Multi-function** button to finish a call.

PAIR DUOLED-BT AND BASE STATION (OPTIONAL)

The Headset and the Base Station are paired by default. If you accidentally unpair them, proceed with the following steps:

1. Press **Pairing** button on the Base Station
2. Make sure the Headset is powered off. Press and hold the **Multi-function** button for 3 seconds until you hear "Power on". Keep pressing for 3 seconds more until you hear "Pairing"
3. If pairing is successful, the voice prompt announces "Paired... Your headset is connected"

Full guide online



www.wildix.com